



FPC(UK) Ltd Manufacturers and suppliers
of quality **Firesure®** Fire Protection Products.

Tel:- 01384 633660

www.fpc-uk.com Email:- sales@fpc-uk.com

Home of **Firesure®** 'Fire Protection Certified', range of products .

Data Sheet 10003

Firesure fire rated cloth barrier range

Description

The **Firesure®** Range of Curtain Style Cloth Fire Barrier are available fire rated to 30minute, 60 minute or 90 minute (integrity only) The range is manufactured from a high-performance, PU-coated two sides glass cloth made up from a woven glass fibre core coated with aluminium pigmented PU on both sides. It offers Fire Integrity protection only having a zero insulation value. **Firesure®** Range of Curtain Style Cloth Fire Barrier can be used in partition walls, Loft rooms, as a fire stop barrier, and cavity barriers also other site specific uses for stopping fire spreading. **Firesure®** Range of Curtain Style Cloth Fire Barrier is designed to be easily fitted at the time of new build or can be retrofitted just as easily.

Features and Benefits

All fire tests are integrity only tests

30 minute Fire Tested to; BS476: part 22
30 minute Fire Tested to; BSEN1350-1 TO A2,S1,do
60 minute Fire Tested to; BS476: part 20 & 22
60 minute Fire Tested to; BSEN1350-1 TO A2,S1,do
90 minute Fire Tested to; BS476: part 20 & 22
90 minute Fire Tested to; BSEN1350-1 TO A2,S1,do

30 minute rated weigh nominal 250 g/m² (+- 12%)
60 minute rated weigh nominal 465 g/m² (+- 12%)
90 minute rated weigh nominal 475 g/m² (+- 12%)

Tensile strength to BS EN ISO 13934-1; 2013 (+- 12%)

30 minute rated Warf; 1400 N/5cm. Weft; 1300 N/5cm
60 minute rated Warf; 2700 N/5cm. Weft; 2000 N/5cm
90 minute rated Warf; 2700 N/5cm. Weft; 2000 N/5cm

Unaffected by water/moisture and none toxic.

Lightweight (one person can install) from below or above

Fabric has good tear and abrasion performance

Self supporting when fitted

EASY site assembly and fixing

Maintenance free when fitting

Cost effective,

The FPC range of **Firesure®** is probably the only range backed by **Failure to perform insurance** called Efficacy insurance (or 'failure to perform' cover) protects you against the legal liability for injury to third parties, or damage to third party property, when a product or service you supply fails to perform its intended function subject to being fitted all in accordance with specified installation details and within the tested scope of application.

Covered up to £10,000,000.00 .



As stated above this range only has FIRE INTEGRITY no INSULATION VALUE CHECK SUITABILITY WITH SITE FIRE CONTROL



FPC(UK) Ltd Manufacturers and suppliers of quality **Firesure**® Fire Protection Products.

Tel:- 01384 633660

www.fpc-uk.com Email:- sales@fpc-uk.com


Home of **Firesure**® 'Fire Protection Certified', range of product

Firesure fire rated cloth barrier range

Below are standard manufactured sizes, any other sizes are made to order

Product Reference	Nominal Width (mm)	Roll Length	HOW SOLD	Fire Rating
FPC/FRCB/30/1100/50mt	1100	50 MT	FULL ROLL ONLY THIS CODE	30/0
FPC/FRCB/30/1270/50mt	1270	50 MT	FULL ROLL ONLY THIS CODE	30/0
FPC/FRCB/30/1320/50mt	1320	50MT	FULL ROLL ONLY THIS CODE	30/0
FPC/FRCB/30/1550/50mt	1550	50MT	FULL ROLL ONLY THIS CODE	30/0
FPC/FBCB/30/1100/cutLM	1100	LM	CUT CODE SUPPLIED BY LIN MT	30/0
FPC/FBCB/30/1270/cutLM	1270	LM	CUT CODE SUPPLIED BY LIN MT	30/0
FPC/FBCB/30/1320/cutLM	1320	LM	CUT CODE SUPPLIED BY LIN MT	30/0
FPC/FBCB/30/1550/cutLM	1550	LM	CUT CODE SUPPLIED BY LIN MT	30/0
FPC/FRCB/30/1100/25LM	1100	25 MT	FULL ROLL ONLY THIS CODE	30/0
FPC/FRCB/30/1320/25 LM	1320	25 LM	FULL ROLL ONLY THIS CODE	30/0
FPC/FRCB/60/1300/50mt	1300	50 MT	FULL ROLL ONLY THIS CODE	60/0
FPC/FRCB/60/1300/cut LM	1300	LM	FULL ROLL ONLY THIS CODE	60/0
FPC/FRCB/90/1300/50mt	1300	50 MT	FULL ROLL ONLY THIS CODE	90/0
FPC/FRCB/90/1300/cut LM	1300	LM	FULL ROLL ONLY THIS CODE	90/0

ABOVE FIRE RATED TO INTEGRITY ONLY AS STATED BEFORE PLEASE CHECK FOR SUITABILITY BEFORE ORDERING

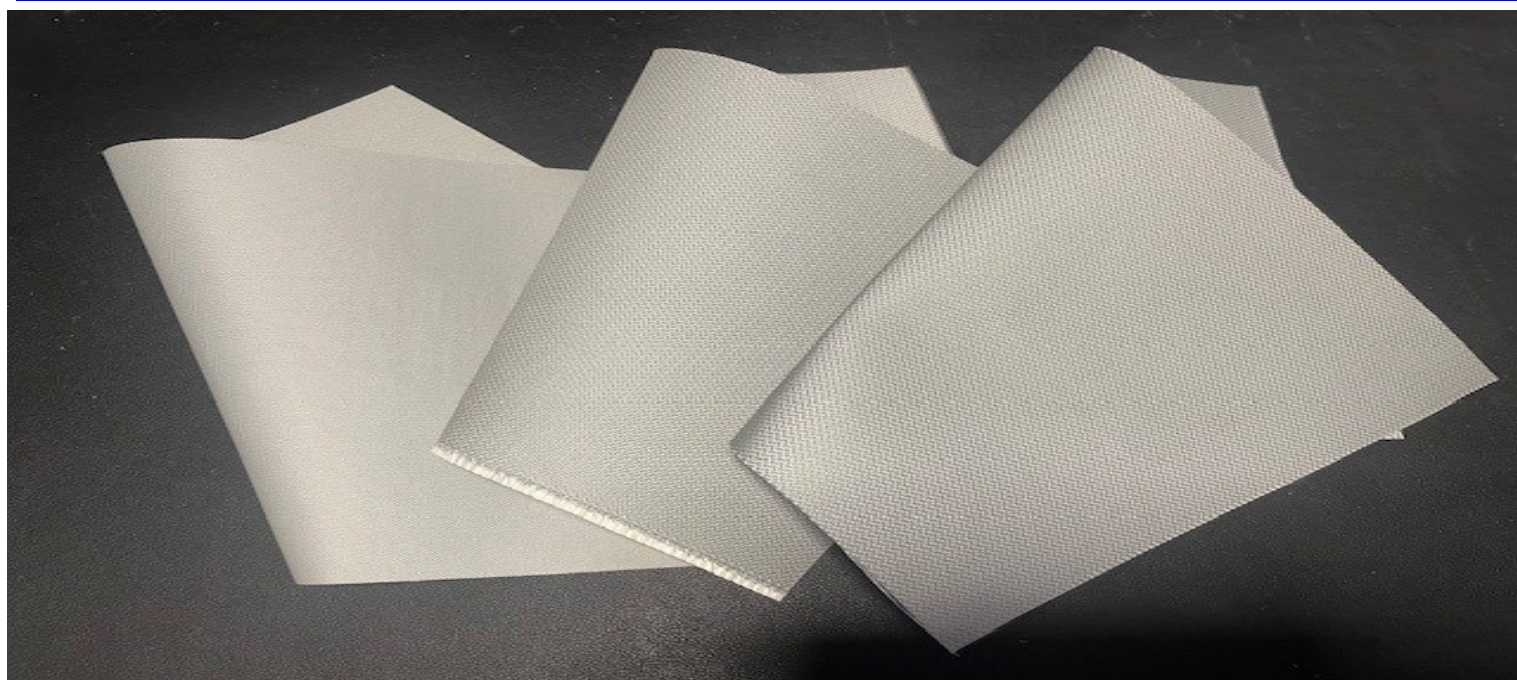

ABOVE RIGHT TO LEFT 30 minute rated—60 minute rated—90 minute rated as stated integrity only

This product should be fitted as above. All the information issued in this data sheet is believed to be current and accurate at date of publication, but in no way is it intended as a warranty, expressed or implied. User must satisfy themselves as to suitability for their individual application and use. It is users responsibility to ensure they have correct up to date issue of this data sheet.