



FPC(UK) Ltd Manufacturers and suppliers of quality Firesure™ Fire Protection Products.

Firesure® Fire and Acoustic Socket & Switch Protection - Gaskets


Intumescent Gaskets

The Firesure™ Socket and Switch Gaskets contain Intumescent Material which in the event of a fire expands to seal against the passage of smoke and fire. Used within socket and switch boxes that are fitted into plasterboard, brick or blockwork.

The Gaskets are easy to install with no screws or assembly required. They can be simply stuck inside to the back face of the box. To fix, remove backing tape on back of gasket and press into place on the inside rear face of the box.

The Gasket meets all the requirements of the UK Building Regulations

Available in two sizes—Single & Double
Suitable for both shallow and deep depth boxes.

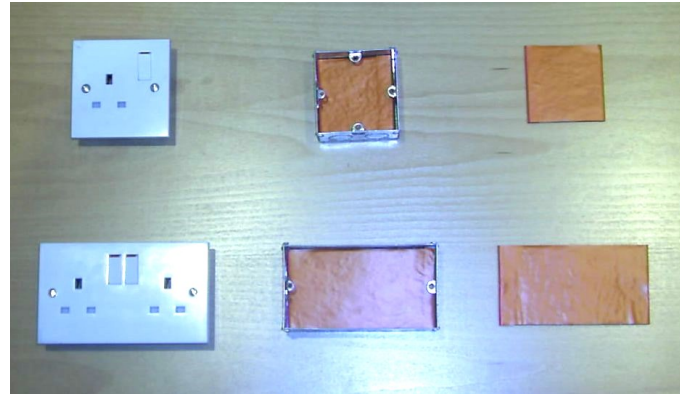

Features and Benefits

Provides a full fire barrier for switches and sockets
1 and 2 hour Fire Rated
Easy to install - no screws, fixing or assembly required
Available in 2 sizes – single and double
Cable entries can be made on any part
Rot proof and unaffected by moisture
Cost effective, Easy to install
Non-toxic and maintenance free

Test Data - Fire and Acoustic Testing

60 minute Fire Tested to the relevant parts of BS 476: Pt 20:1987 & BS 476: Pt 22: 1987

And BS EN 1363-1: 2012 and BS EN 1366-3: 2009

In excess of 2 hours fire rating in metal boxes
Suitable for single and double shallow and deep depths.
Tested Back to Back not offset in both Fire and Acoustic Tests.
Acoustically Rated (back to back) to 64dB

Putty Pads



Features and Benefits

Provides a full fire barrier for switches and sockets
2 hour Fire Rated
Can be used for all dry lining applications
Easy to install - no screws, fixing or assembly required
Available in 2 sizes – single and double
Unaffected by moisture
Cost effective, Easy to install
Non-toxic and maintenance free
Sound Insulating

Socket & Switch Inserts



Features and Benefits

Provides a full fire barrier for switches and sockets
2 hour Fire Rated
Easy to install - no screws, fixing or assembly required
Available in 2 sizes – single & double & depths - 35mm and 47mm
Cable entries can be made on any part
Cost effective, Easy to install
Non-toxic and maintenance free
Acoustically Rated to 67dB